



NEUMO CleanClip

**Adaptive Pipe Hangers
for Hygienic Applications**

Discover more inside!

CleanClip - NP / NPF / NPM / NPR / NPC

Types	Clamp only	Clamp & Shaft		
		Fixed	Adaptive	
			Rotation 360°	Tilt 4°
NP	✓			
NPF (Fixed)		✓		
NPM (Moving)			✓	✓
NPR (Rotating)			✓	
NPC (Customized)	Please contact our Sales Team			

Versions & Dimensions

DIN11866 Line A (DIN)		
DN	I.D	Ø Shaft
6	8,0	17
8	10,0	17
10	13,0	17
15	19,0	17
20	23,0	17
25	29,0	17
32	35,0	17
40	41,0	17
50	53,0	22
65	70,0	22
80	85,0	22
100	104,0	22
125	129,0	22
150	154,0	34
200	204,0	34
	mm	mm

DIN11866 Line B (ISO)		
DN	I.D	Ø Shaft
6	10,2	17
8	13,5	17
10	17,2	17
15	21,3	17
20	26,9	17
25	33,7	17
32	42,4	17
40	48,3	22
50	60,3	22
65	76,1	22
80	88,9	22
100	114,3	22
125	139,7	22
150	168,3	34
200	219,1	34
	mm	mm

DIN11866 Line C (BPE)		
DN	I.D	Ø Shaft
1/4"	6,35	17
3/8"	9,53	17
1/2"	12,70	17
3/4"	19,05	17
1"	25,40	17
1 1/2"	38,10	17
2"	50,80	22
2 1/2"	63,50	22
3"	76,20	22
4"	101,60	22
6"	152,40	34
	mm	mm



Types - NP / NPF / NPM / NPR



Type NP




Type NPF



Type NPM & NPR

Technical Data

Material	304 Stainless Steel (standard) 316 Stainless Steel (on request)
	Inner Cap PTFE (thermo conductivity) 0,23 W/MK Melting point 327 °C
Shaft	L = 200 mm (standard) Special lengths available! (on request)
NPM Tilt	4° Self Adaptive in each direction
NPR Rotation	360°
NP Thread	3/8" (UNC ANSI B1.1)
	1/2" (UNC ANSI B1.1)
	3/4" (UNC ANSI B1.1)

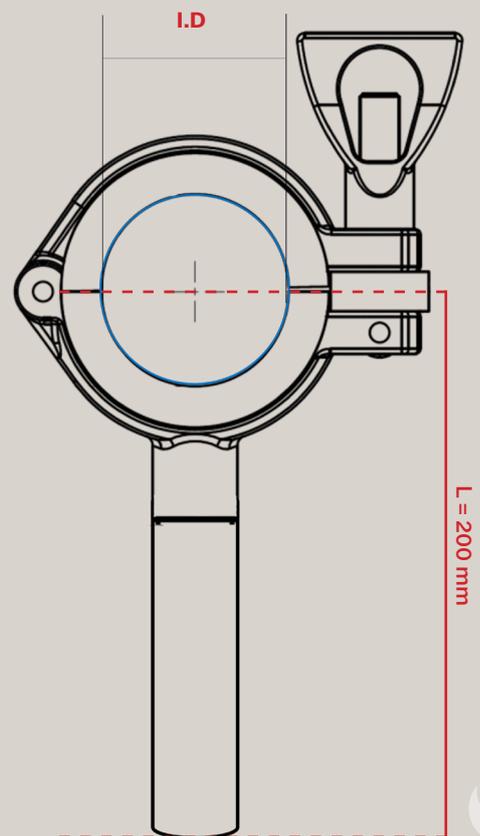

Self Adaptive Design

NEUMO CleanClip pipe hangers are designed to adapt flexibly to the angle of the pipe installation and ensure efficient drainage. They can be rotated 360 degrees and precisely adjusted to the desired alignment of the pipe or tube.

Various Applications

A multifunctional, adjustable and stable hanger that can be used in a wide range of applications, from infrastructure to equipment guidance systems and skids in the pharmaceutical, biotechnology and food industry.

Contact us!



+49 7043 36-0



www.neumo.de

Scan for the right contact