




Blind Ferrule form V




Blind Ferrule form R

Technical Data	
Material*	1.4435 / 316L
Surface finish (product contacted area)*	Ra < 0,8 µm precision turned
Sealing	Elastomer-free (metallic)
Max. permissible pressure	PN10
Max. operating temperature	-10°C / +200°C
Delta ferrite content (raw material)*	< 1%
Connections*	Orbital welding ends in accordance with DIN11866 line A (DIN), line B (ISO), line C (ASME-BPE)



* Alternative material grades (such as 1.4539, 6Mo / UNS N08367, etc.), different connections, finish qualities and delta ferrite values are available on request.

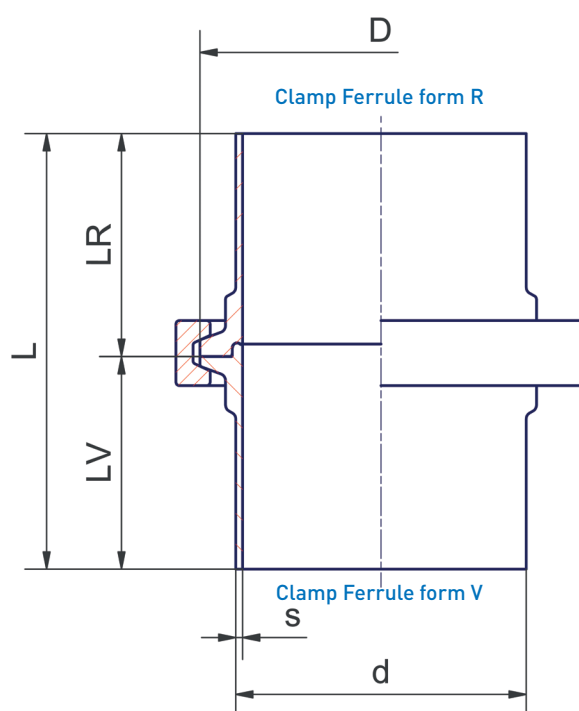

Blind Ferrule form V

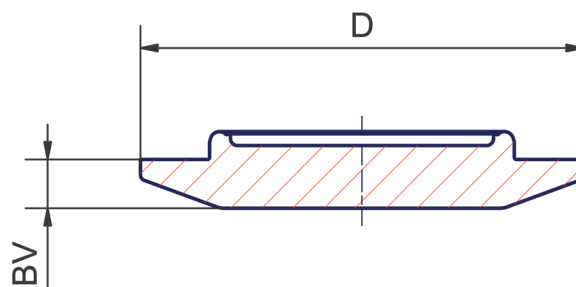

Blind Ferrule form R

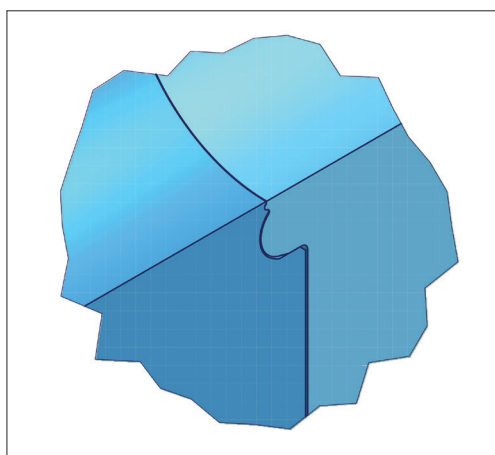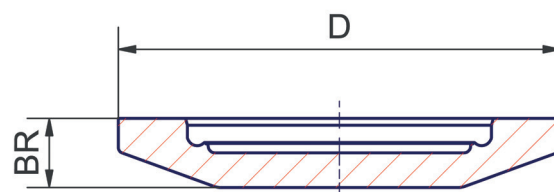



ConnectS® Clamp Connection and Blind Ferrules, tube dimensions in accordance with DIN11866 line A

DN	d	s	D	L	LR	BR	LV	BV
6	8	1	25	69,5	35	10	34,5	6
8	10	1	25	69,5	35	10	34,5	6
10	13	1,5	25	69,5	35	10	34,5	6
15	19	1,5	34	68	35	10	33	6
20	23	1,5	50,5	68	35	10	33	7
25	29	1,5	50,5	76	39	10	37	8
32	35	1,5	50,5	76	39	10	37	8
40	41	1,5	64	76	39	10	37	7
50	53	1,5	77,5	76	39	10	37	8

ConnectS® Clamp Connection and Blind Ferrules, tube dimensions in accordance with DIN11866 line B

DN	d	s	D	L	LR	BR	LV	BV
6	10,2	1,6	25,0	69,5	35	10	34,5	6
8	13,5	1,6	25,0	69,5	35	10	34,5	6
10	17,2	1,6	25,0	69,5	35	10	34,5	6
15	21,3	1,6	50,5	68	35	10	33	7
20	26,9	1,6	50,5	68	35	10	33	7
25	33,7	2	50,5	76	39	10	37	7
32	42,4	2	50,5	76	39	10	37	7
40	48,3	2	64,0	76	39	10	37	7

ConnectS® Clamp Connection and Blind Ferrules, tube dimensions in accordance with DIN11866 line C

DN	d	s	D	L	LR	BR	LV	BV
3/8"	9,53	0,89	25,0	68	35	10	34,5	6
1/2"	12,7	1,65	25,0	68	35	10	34,5	6
3/4"	19,05	1,65	25,0	68	35	10	33	6
1"	25,4	1,65	50,5	68	35	10	33	7
1 1/2"	38,1	1,65	50,5	76	39	10	37	7
2"	50,8	1,65	64,0	76	39	10	37	7